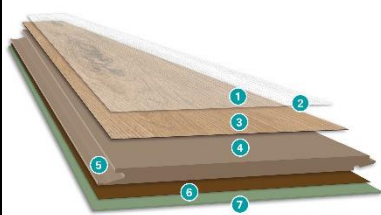


TECHNICAL CHARACTERISTICS

wineo 700 XXL			wineo	
Direct Pressure Laminate flooring according to EN 13329 for glueless installation				
Format	1845 x 244 x 10 mm			
Joint	V4 joint			
Panels / m² per box	4 / 1.80 m²			
Boxes / m² per pallet	42 / 75.60 m²			
Guarantee Guarantee extension	25 years for private use according to Windmüller guarantee conditions – www.wineo.de + 5 years when installed on PU Underlays			
Classification			Product composition	
	Utilization class 23 EN ISO 10874	Domestic area with intensive usage	1	Surface texture registered embossed
	Utilization class 33 EN ISO 10874	Commercial sector with heavy usage	2	Wear layer Melamine resin overlay
	AC5 Abrasion resistance EN 13329, annex E	AC5	3	Decor Decor paper
	Impact resistance EN 17368d, Anhang H	Small-diameter ball test ≥ 70 N Large-diameter ball test ≥ 1000 mm	4	Core board Highly compressed core board
	Resistance to staining EN 438	Group 1 + 2: grade 5 Group 3: grade 4	5	Profile connection Fold-Down (5G) 
	Swelling value ISO 24336	≤ 10 %	6	Backing Melamine resin
	Residual indentation EN ISO 24343-1	Residual indentation ≤ 0.05 mm	Underlay mats: CS-Wert requirement ≥ 120 kPa wineo PERFECT FIT recommendation: soundPROTECT or soundPROTECT Profi (separately available)	
	Effect of a furniture leg EN 424	Foot type 0 – no visible change		
	Thermal resistance EN 12667	0.0745 (m²K)/W		
	Castor chair test EN 425	25000 revolutions no damage with rolls type W		
	Light fastness EN ISO 105-B02	Light fastness (method 2) ≥ 4		
	Antistatic Properties EN 1815	≤ 2 kV	 www.blauer-engel.de/uz176	
	REACH	free from SVHC-substances ≥ 0.1 %		
	Disposal	<u>Private:</u> like laminated furniture; possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170201		
 - 23 -  www.wineo.de EMISSIONS DANS L'AIR INTÉRIEUR  Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)				

Relevant Information:

- Underfloor heating: In conjunction with suitable underlay material (soundPROTECT or equivalent) suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.